



DELUXE PANEL
Tri-color
110-120 Lm/W
30x30cm

Page 73




DELUXE PANEL
Tri-color
110-120 Lm/W
60x120cm

Page 79



DELUXE PANEL
Tri-color
110-120 Lm/W
30x60cm

Page 74



PREMIUM PANEL
Tri-color
140-150Lm/W
30x30cm/30x60cm
30x120cm/60x60cm
60x120cm/62x62cm

Page 80



DELUXE PANEL
Tri-color
110-120 Lm/W
30x120cm

Page 76



SP PANEL
110-120 Lm/W
60x60cm

Page 82



DELUXE PANEL
Tri-color
110-120 Lm/W
60x60cm

Page 77



Omega Panel
Easy Air Sensor

Page 83



Accessories for panel

Page 84



DESCRIPTION

Extra thin aluminum frame
10mm
110-120 Lm/W
White flat frame

Installation:
Recessed / surface mounting /
suspension installation

1-10V dimming or Non-dim-
mable

Color switch: 3000/4000/5000K


Certificates: CE/TÜV/SAA/RoHS

Colors: White



LED	5 YEARS WARRANTY	CE	50000h	L 70 B 50	MacAdam 3	IP 20	Hg 0.0mg
			200-240V 50/60Hz	1-10V Dimmable	ON OFF >100000	80% ≤1S	120°

PHOTOMETRIC CURVE

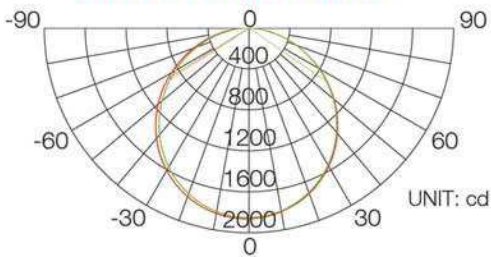


AREA OF USE

Shops and other public places

	A	B	C
301	295	295	10

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30110	>80 Ra	1750 lm	16 W	3/4/5000K	>19
30120	>80 Ra	1900 lm	16 W	3/4/5000K	<19

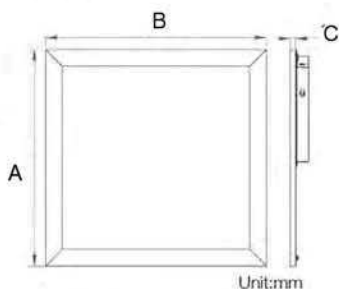

DESCRIPTION

Extra thin aluminum frame
10mm
110-120 Lm/W
White flat frame



Installation:
Recessed / surface mounting /
suspension installation

1-10V dimming or Non-dim-
mable


Color switch: 3000/4000/5000K

Certificates: CE/TÜV/SAA/RoHS

Colors: White

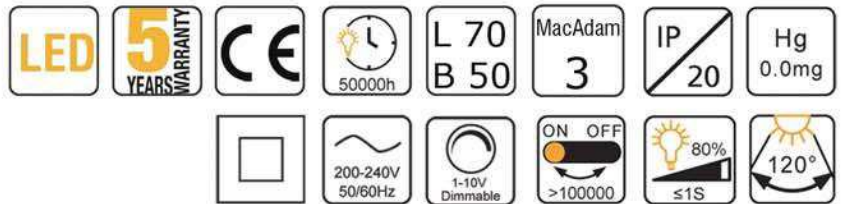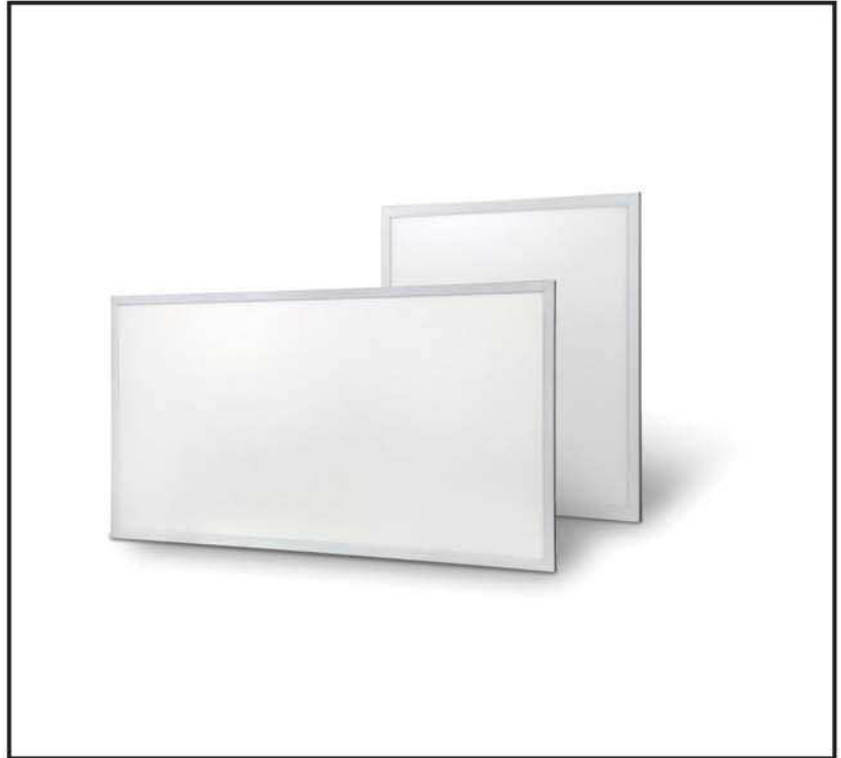

PHOTOMETRIC CURVE

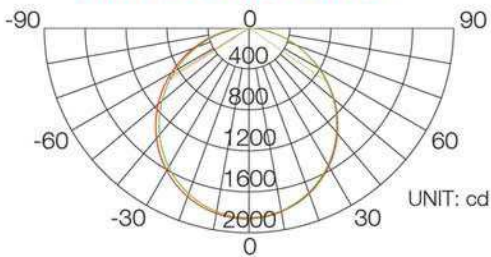


AREA OF USE

Shops and other public places

	A	B	C
302	295	595	10

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30210	>80 Ra	2450 lm	20 W	3/4/5000K	>19
30220	>80 Ra	2650 lm	20 W	3/4/5000K	<19





DESCRIPTION

Extra thin aluminum frame
10mm
110-120 Lm/W
White flat frame



Installation:
Recessed / surface mounting /
suspension installation

1-10V dimming or Non-dim-
mable


Color switch: 3000/4000/5000K

Certificates: CE/TÜV/SAA/RoHS

Colors: White

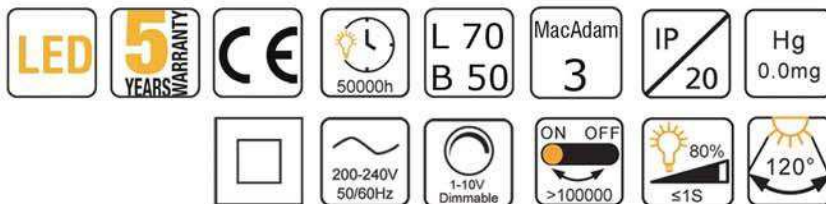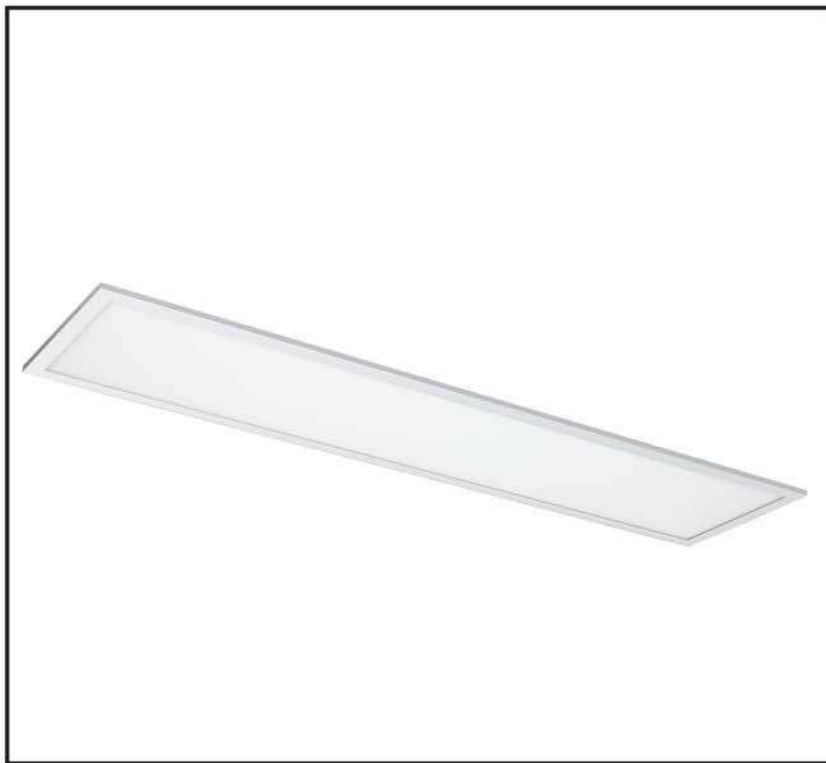


PHOTOMETRIC CURVE

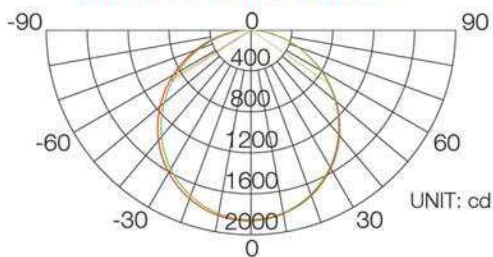

AREA OF USE

Shops and other public places

	A	B	C
303	1195	295	10

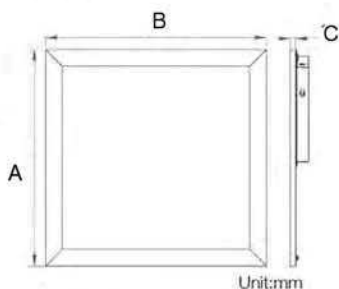

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30310	>80 Ra	3840 lm	32 W	3/4/5000K	>19
30315	>80 Ra	4800 lm	40 W	3/4/5000K	>19
30320	>80 Ra	3840 lm	32 W	3/4/5000K	<19
30325	>80 Ra	4800 lm	40 W	3/4/5000K	<19

DESCRIPTION

Extra thin aluminum frame
10mm
110-120 Lm/W
White flat frame


Installation:
Recessed / surface mounting /
suspension installation

1-10V dimming or Non-dim-
mable


Color switch: 3000/4000/5000K

Certificates: CE/TÜV/SAA/RoHS

Colors: White

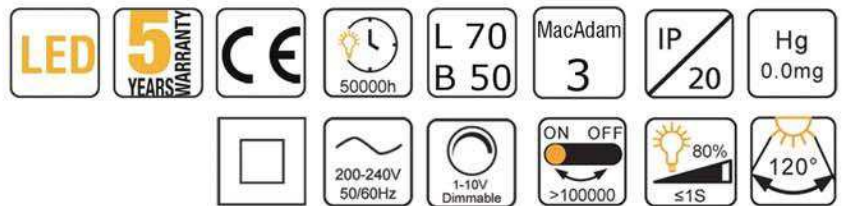


PHOTOMETRIC CURVE

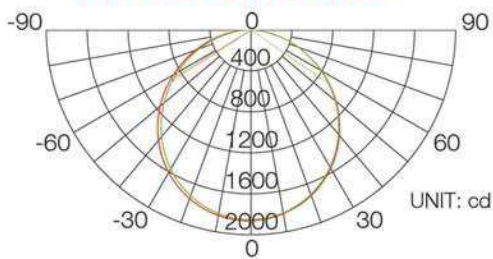

AREA OF USE

Shops and other public places

	A	B	C
304	595	595	10

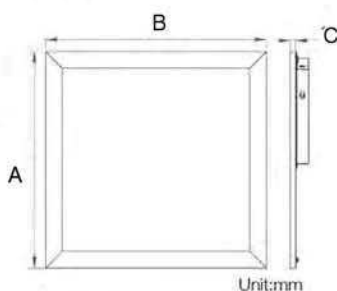

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30410	>80 Ra	3840 lm	32 W	3/4/5000K	>19
30415	>80 Ra	4800 lm	40 W	3/4/5000K	>19
30420	>80 Ra	3840 lm	32 W	3/4/5000K	<19
30425	>80 Ra	4800 lm	40 W	3/4/5000K	<19



DESCRIPTION

Extra thin aluminum frame
10mm
110-120 Lm/W
White flat frame

Installation:
Recessed / surface mounting /
suspension installation

1-10V dimming or Non-dim-
mable

Color switch: 3000/4000/5000K


Certificates: CE/TÜV/SAA/RoHS

Colors: White



LED	5 YEARS WARRANTY	CE	50000h	L 70 B 50	MacAdam 3	IP 20	Hg 0.0mg	
				200-240V 50/60Hz	1-10V Dimmable	ON OFF >100000	80% ≤1S	120°

PHOTOMETRIC CURVE

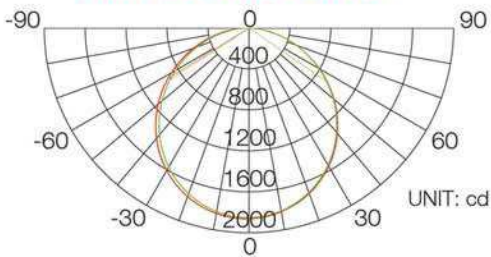


AREA OF USE

Shops and other public places

	A	B	C
305	1195	595	10

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30510	>80 Ra	7200 lm	60 W	3/4/5000K	>19
30520	>80 Ra	7200 lm	60 W	3/4/5000K	<19

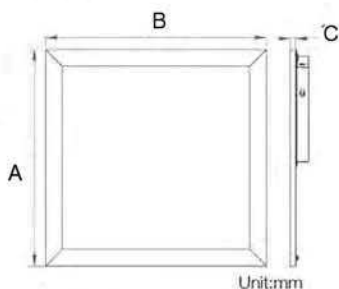


Premium Paneler

DESCRIPTION


Extra thin aluminum frame
10mm
140-150 Lm/W
White flat frame, can be delivered with silver frame.
Installation:
Recessed / surface mounting / suspension installation
1-10V dimming or Non-dimmable
Size: 30x30cm, 30x60cm
30x120cm, 60x60cm
60x120cm, 62x62cm

Certificates: CE/TÜV/SAA/RoHS


Colors: White

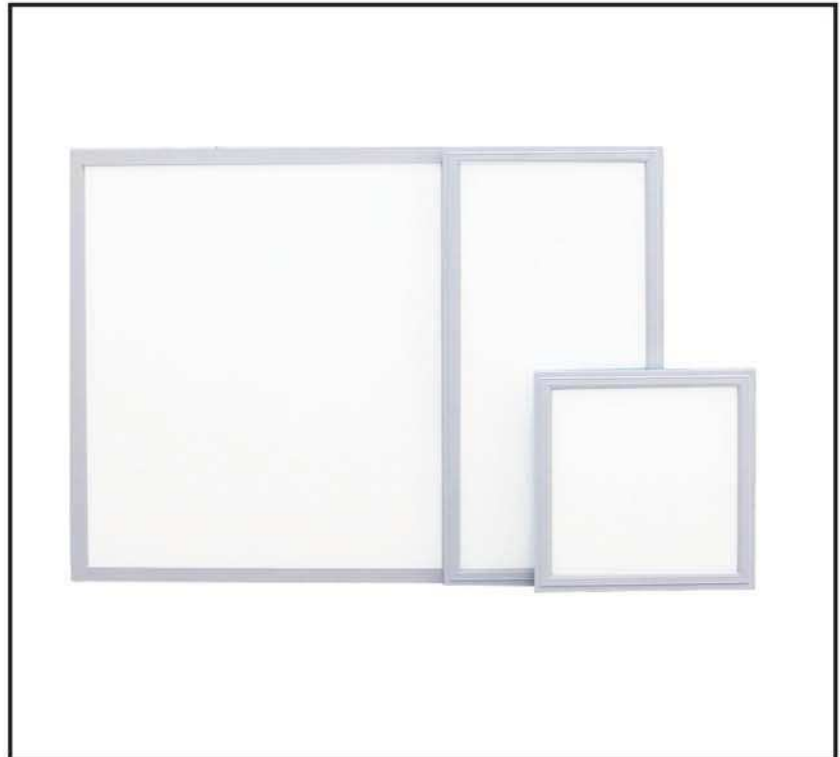


LED PANEL

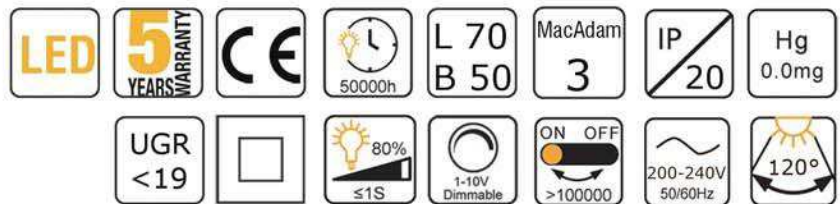

PHOTOMETRIC CURVE

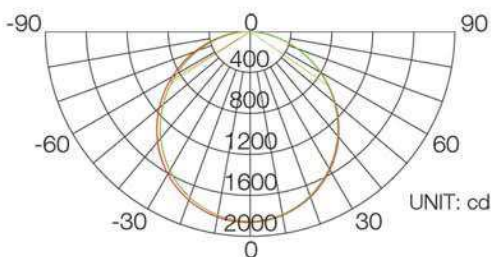

	A	B	C
30600/1	10	295	295
30602/3	10	295	595
30604/5	10	295	1195
30606/7	10	595	595
30608/9	10	595	1195
306010/11	10	620	620

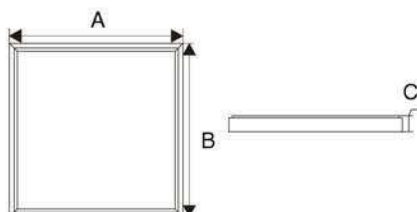

AREA OF USE

Shops and other public places

CAN BE DELIVERED WITH

3000K/4000K

TYPE	CRI	LIGHT OUT	POWER	KELVIN
30600	>80 Ra	2240 lm	16 W	3000K
30601	>80 Ra	2400 lm	16 W	4000K
30602	>80 Ra	2940 lm	21 W	3000K
30603	>80 Ra	3150 lm	21 W	4000K
30604	>80 Ra	3500 lm	25 W	3000K
30605	>80 Ra	3750 lm	25 W	4000K
30606	>80 Ra	3500 lm	25 W	3000K
30607	>80 Ra	3750 lm	25 W	4000K
30608	>80 Ra	7000 lm	50 W	3000K
30609	>80 Ra	7500 lm	50 W	4000K
30610	>80 Ra	3500 lm	25 W	3000K
30611	>80 Ra	3750 lm	25 W	4000K

KØLD



BOEUF
FUGNESS
30,-

GRØDT
MARKED
100,-

TOMME DE
SAVOYE
19.99
PR. 100 G.

KØD FISK & DELI

KØD FISK & DELI

KØD FISK & DELI

59,-

28,-

30,-

99,-

21,-

DESCRIPTION

Using Hi-quality, Hi-brightness LED as lighting source, high efficiency and energy-saving. Free from glare and flicker, and has average luminous surface. Aluminum heat-sink base and No Glare
 110-120 Lm/W
 LED Type: SMD4014

Installation:
 Recessed / surface mounting / suspension installation

1-10V dimming or Non-dim-mable

Certificates: CE/RoHS

Colors: White




AREA OF USE

Hotels, Offices, Commercial Purposes, Institution Buildings, Schools, Colleges, Universities, Hospitals

CAN BE DELIVERED WITH

3000+4000K

	A	B	C
SR panel	595	595	9

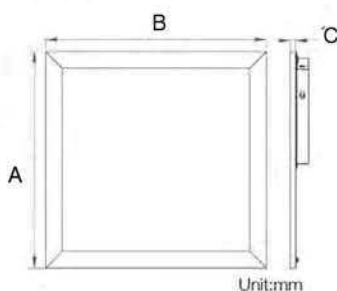

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP	UGR
30430	>80 Ra	3960 lm	36 W	3000K	>19
30431	>80 Ra	4140 lm	36 W	4000K	>19
30432	>80 Ra	3960 lm	36 W	3000K	<19
30433	>80 Ra	4140 lm	36 W	4000K	<19

Omega panel

LED PANEL LIGHT

DESCRIPTION

Connect Bluetooth between the mobile phone and the smart panel light, then the mobile phone APP can control the lamp.

Users can adjust the brightness and color temperature of lamps according to their own needs.

Features and Advantages of Bluetooth Mesh Networking

The brightness can be adjusted automatically according to the ambient light intensity which collected by photosensor.

PIR sensor

The mobile phone APP can adjust the brightness, color temperature, on/off state of the photosensor and PIR sensor.

Material: Aluminium frame.

Surface mount/pendant/recessed

Certificates: CE/RoHS

Colors: White



LED	5 YEARS WARRANTY	CE	40000h	L 70 B 50	MacAdam >3	IP 20	Hg 0.0mg
				UGR <19	200-240V 50/60Hz	ON OFF >100000	90°

GATEWAY



Gateway with USB cable adaptor + user manual

AREA OF USE

Hotels, Offices, Commercial Purposes, Institution Buildings, Schools, Colleges, Universities, Hospitals

CAN BE DELIVERED WITH

3000-6500K
Philips EasyAir sensor

	A	B	C
30440	595	595	8.5
30340	295	1195	8.5

TYPE	CRI	LIGHT OUT	POWER	COLOR TEMP
30440	>80 Ra	3300-4000Lm	40 W	3000-6500K
30340	>80 Ra	3300-4000Lm	40 W	3000-6500K
30940	Gateway			



Accessories for panel

LED PANEL



Suspension kits



**Surface mounting kits
30x30cm panel/
60x60cm panel**



**Emergency kit
Can be delivered on
request**



**Surface mounting kits
30x120cm panel/
60x120cm panel**

